

J55 SL

Spare parts

Ersatzteile

Pièces détachées

Reserve onderdelen

Repuestos

Reservdelar

GPL®

This exploded view diagram illustrates the assembly of a lawnmower. The central component is the engine, labeled 64, which is mounted on a base plate, 12. The engine is connected to a drive shaft, 10, which passes through a series of gears and bearings, including a large gear, 35, and a smaller gear, 32. The drive shaft is connected to a cutting deck, 44, which is mounted on a base plate, 11. The cutting deck is equipped with a cutting blade, 47, which is secured by a blade bolt, 50, and a blade bracket, 48. The cutting deck is also connected to a rear wheel, 27, which is mounted on a rear axle, 46. The rear wheel is connected to a rear suspension system, including a rear shock absorber, 45, and a rear spring, 42. The front of the lawnmower features a front wheel, 25, which is mounted on a front axle, 43. The front wheel is connected to a front suspension system, including a front shock absorber, 38, and a front spring, 36. The front of the lawnmower also features a handle, 1, which is connected to a front bracket, 6, and a front spring, 36. The handle is equipped with a trigger switch, 2, and a safety kill switch, 19. The lawnmower is also equipped with a fuel tank, 33, and a fuel line, 8. The diagram includes numerous other components, such as bolts, nuts, washers, and brackets, all labeled with numbers for identification.

ROTARY LAWN MOWER - - MODEL NUMBER J55SL (96121001800) PRODUCT NUMBER 961 21 00-18


KEY NO.	PART NO.	DESCRIPTION
1	532 41 60-58	Upper Handle
2	532 14 92-93	Engine Zone Control Cable
5	532 06 64-26	Wire Tie
6	532 41 66-68	Handle Knob
8	532 19 05-27	Control Bar
9	532 19 58-00	Support Bracket, Handle, LH
10	532 17 09-75	Handle Bracket Assembly, RH
11	532 19 57-99	Support Bracket, Handle, RH
12	532 17 09-77	Handle Bracket Assembly, LH
14	532 14 97-41	Screw, Thread Cutting 5/16-18 x 3/4
16	532 05 45-83	Screw, Tapping, Hex Head 1/4-20 x 1/2
17	532 17 71-41	Rod, Support
18	532 13 20-04	Locknut, Keps
19	532 19 47-88	Rope Guide
20	532 15 41-47	Foot Guard
24	532 06 91-80	Nut, Hex
25	532 40 91-49	Locknut, Hex 3/18-16
27	532 41 08-15	Wheel & Tire Assembly, Rear
28	532 14 27-48	Shoulder Bolt
29	532 40 16-30	Curved Washer
30	532 40 65-82	Axle Arm Assembly
31	532 13 28-00	Knob, Selector
32	532 40 64-28	Spring, Selector
33	532 19 60-10	Discharge Guard
34	532 40 16-29	Spacer
35	532 41 08-07	Bracket, Wheel Adjuster
36	532 15 41-32	Bracket, Housing
38	532 19 60-11	Deflector, Discharge
39	532 41 93-62	Support Bracket, LH
40	532 41 93-61	Support Bracket, RH
41	532 15 04-06	Screw, Hex Head, Threaded, Rolled 3/8-16 x 1-1/8
42	532 15 21-24	Spring, Torsion
43	873 80 04-00	Locknut, Hex

KEY NO.	PART NO.	DESCRIPTION
44	532 40 06-60	Kit, Mower Housing (Includes Key Number 52)
45	532 14 72-86	Rod, Hinge
46	532 18 91-79	Blade Adapter / Pulley
47	532 19 93-79	Blade, 22"
48	532 85 10-74	Washer, Hardened
49	532 85 02-63	Washer, Lock, Helical
50	532 85 10-84	Screw, Hex Head 3/8-24 x 1-3/8 (Grade 8)
52	532 18 21-66	Decal, Danger
54	532 08 83-48	Washer, Flat 3/8
55	532 19 09-39	Mounting Bracket, Debris Shield
56	532 08 58-25	Screw, Hex Washer Head #10-24 x 1/2
57	532 05 17-93	Hairpin Cotter
58	532 41 93-63	Lower Handle
59	532 19 17-30	Locknut, Hex 1/4-20
60	874 76 06-12	Bolt, Hex Head 3/8-16 x 3/4
61	532 75 15-92	Locknut, Hex
62	532 40 58-43	Debris Shield
63	532 19 23-25	Screw, Debris Shield
64	- - -	Engine, Briggs & Stratton, Model Number 124T02 (Order parts from engine manufacturer)
67	532 19 74-80	O-Ring
68	532 70 04-17	Control Throttle
69	532 18 33-65	Screw Hex 1/4 x 20 x 2.17
70	532 11 11-90	B&S Cable Clamp (#213146)
71	532 08 38-16	Screw #10 x 5/8
72	532 19 79-91	Clip, Cable
74	532 16 42-65	Handle Grip
75	532 19 92-55	Stud
76	532 75 11-53	Nut, Hex
--	532 18 21-34	Warning Decal (not shown)
--	532 41 90-73	Operator's Manual, European
--	532 41 90-74	Operator's Manual, Scandinavian
--	532 41 90-75	Operator's Manual, East Bloc
--	532 41 90-76	Operator's Manual, Baltic

NOTE: All component dimensions given in U.S. inches. 1 inch = 25.4 mm

IMPORTANT: Use only Original Equipment Manufacturer (O.E.M.) replacement parts. Failure to do so could be hazardous, damage your lawn mower and void your warranty.

ROTARY LAWN MOWER - - MODEL NUMBER J55SL (96121001800) PRODUCT NUMBER 961 21 00-18

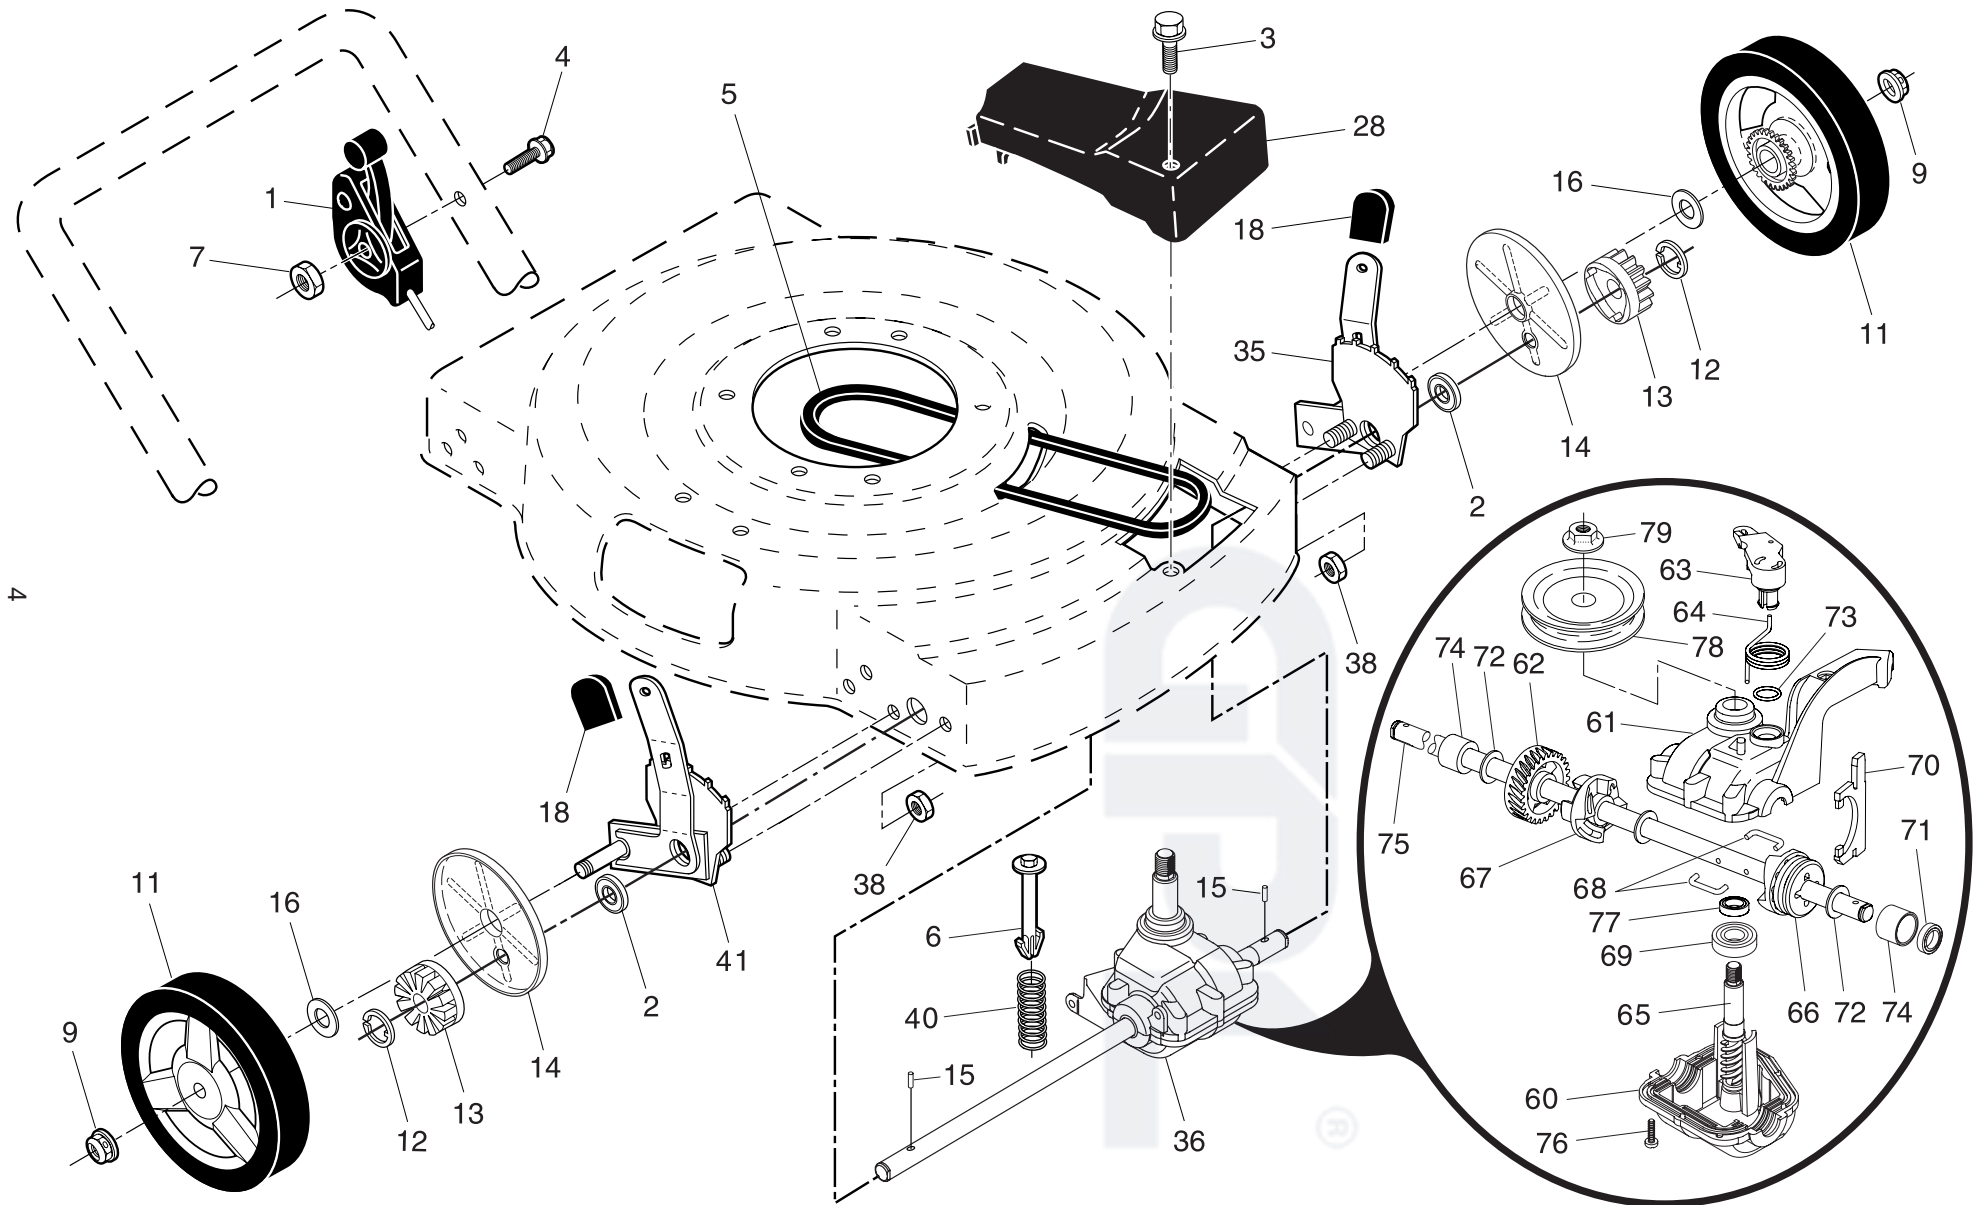

ROTARY LAWN MOWER - - MODEL NUMBER J55SL (96121001800) PRODUCT NUMBER 961 21 00-18

KEY NO.	PART NO.	DESCRIPTION
1	532 18 45-88	Drive Control Assembly (Includes Cable)
2	532 19 10-39	Bearing, Wheel Adjuster
3	532 14 36-03	Screw, Tapping, Pan Head #10-24 x 2-3/4
4	532 15 87-55	Screw, Machine, Pan Head 1/4-20 x 2-3/16
5	532 14 65-27	V-Belt
6	532 15 04-95	Bolt, Hex Head 1/4-20 x 2
7	532 19 17-30	Nut, Hex
9	532 40 91-48	Locknut, Hex
11	532 41 10-81	Wheel & Tire Assembly
12	812 00 00-58	E-Ring
13	532 40 38-49	Pinion
14	532 18 94-03	Dust Cover
15	532 40 48-45	Pawl, Drive
16	532 06 77-25	Washer
18	532 13 28-00	Knob, Selector
28	532 19 60-08	Drive Cover
35	532 40 88-62	Kit, Wheel Adjuster, LH (Includes Knob and Bearing)
36	532 41 52-26 *	Gear Case Assembly, Complete
38	873 80 04-00	Locknut, Hex
40	532 13 70-90	Spring
41	532 40 88-61	Kit, Wheel Adjuster, RH (Includes Knob and Bearing)

KEY NO.	PART NO.	DESCRIPTION
60	532 18 34-97	Case, Lower
61	532 18 34-98	Case, Upper
62	532 18 34-99	Gear, 27 Teeth
63	532 18 35-00	Lever, Clutch
64	532 18 35-01	Spring, Return
65	532 41 69-88	Shaft, Input
66	532 18 35-03	Dog, Movable
67	532 18 35-04	Dog, Fixed
68	532 18 35-05	Wire, Formed
69	532 18 35-06	Bearing, Ball
70	532 18 35-07	Fork, Shift
71	532 18 35-08	Seal, Output Shaft
72	532 18 35-09	Washer
73	532 18 35-10	Seal, Case
74	532 18 35-11	Bushing
75	532 19 65-61	Shaft, Output
76	532 18 35-13	Screw
77	532 18 35-14	Seal, Input Shaft
78	532 41 69-87	Pulley, Drive
79	532 41 69-86	Nut

* We advise Total Multis EP00 semi-liquid grease or a comparable grade (quantity 1.15 oz)

NOTE: All component dimensions given in U.S. inches. 1 inch = 25.4 mm

IMPORTANT: Use only Original Equipment Manufacturer (O.E.M.) replacement parts. Failure to do so could be hazardous, damage your lawn mower and void your warranty.